(12) UK Patent Application (19) GB (11) 2 252 567 (13) A

(43) Date of A publication 12.08.1992

(21) Application No 9102806.8

(22) Date of filing 11.02.1991

(71) Applicant
Institut Elektrosvarki Imeni E O Patona Akademii Nauk Ukrainskoi SSR

(Incorporated in the Soviet Union)

Ulitsa Bozhenko 11, Kiev, Soviet Union

(72) Inventors
Boris Alexeevich Movchan
Igor Sergeevich Malashenko
Nikolai Ivanovich Grechanjuk
Konstantin Juvenalievich Yakovchuk
Sergei Viktorovich Domoroslov

(74) Agent and/or Address for Service
Marks & Clerk
57-60 Lincoln's Inn Fields, London, WC2A 3LS,
United Kingdom

(51) INT CL^5
C23C 14/16 14/08

(52) UK CL (Edition K)
C7F FPDX FP811 FP820 FP841 FP852 FP853
FP861 FP862 FP864 FP902 FQ811 FQ820 FQ841
FQ852 FQ853 FQ862 FQ887 FQ914 FR914 FR915
FR916 F102
U1S S1990 S2036 S3010

(56) Documents cited
GB 2226050 A   GB 2206358 A   GB 2159838 A
EP 0266299 A2   EP 0185603 A1   US 4851300 A

(58) Field of search
UK CL (Edition K) C7F FBAX FBBX FBXX FGA FGZ
FPCX FPDX FPEX
INT CL^5 C23C
Online databases; WPI

(54) Metal/ceramic protective coating for superalloy articles

(57) A metal/ceramic protective coating as illustrated in Fig 1 for superalloy articles comprises an outer ceramic layer (1) comprising metal oxides; an oxidation-resistant layer (2) comprising an M–Cr–Al–Y alloy, where M comprises Ni, Co, Fe, or a combination thereof, with an Al content in the oxidation-resistant layer (2) of 7.5–14.0% by weight; and an inner plastic layer (3) comprising an M–Cr–Al–Y alloy, where M comprises Ni, Co, Fe, or a combination thereof, with an Al content in the inner plastic layer of 2.5–5.5% by weight, lying between the oxidation-resistant layer (2) and the surface of a superalloy article (4), wherein the ratio of thicknesses of the oxidation-resistant layer (2) and the inner plastic layer (3) is 4.0–1.0. The ceramic layer may be formed of yttria-stabilized zirconia which may contain TiB_2, ZrB_2, HfB_2, or Ce_2S_3. In addition there may be an aluminide layer between the inner plastic layer and the surface of the superalloy article. The coated product finds use as gas turbine blades or in parts for internal combustion engines.
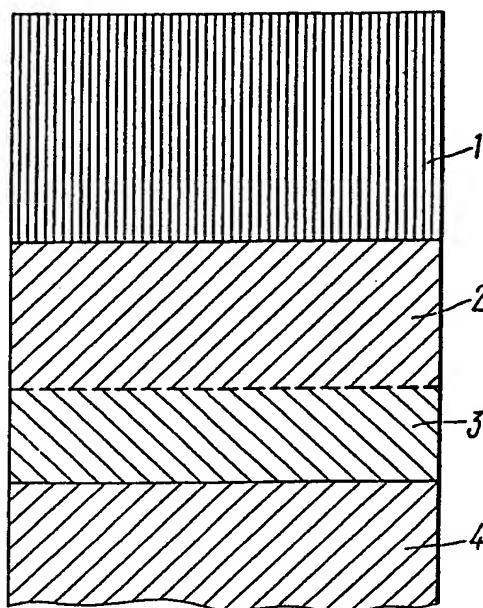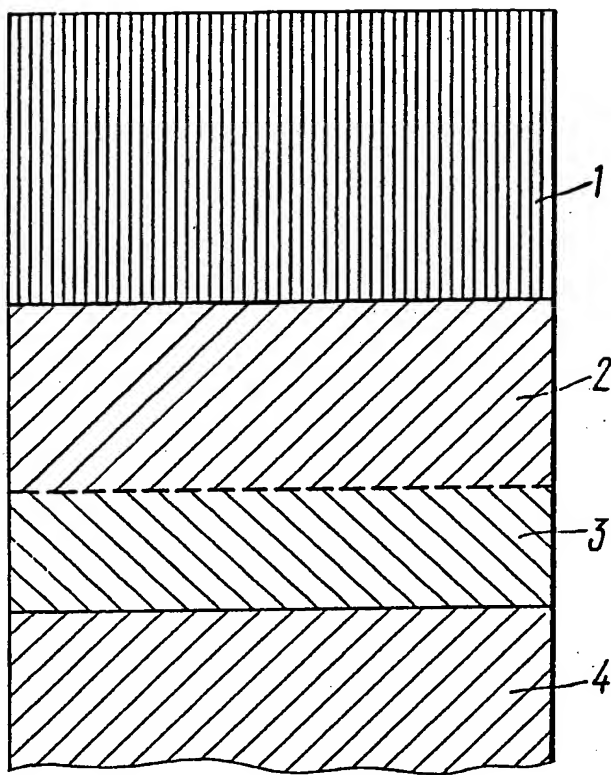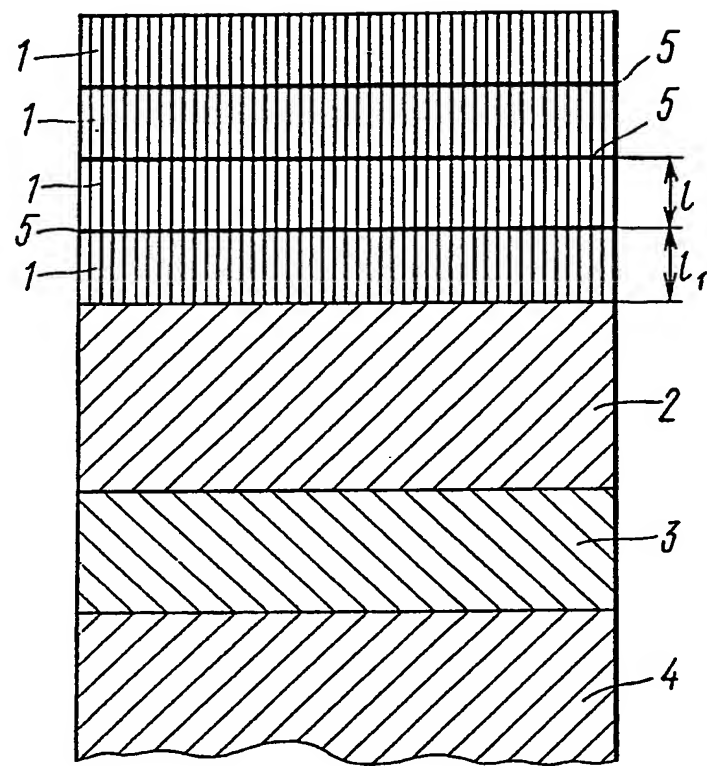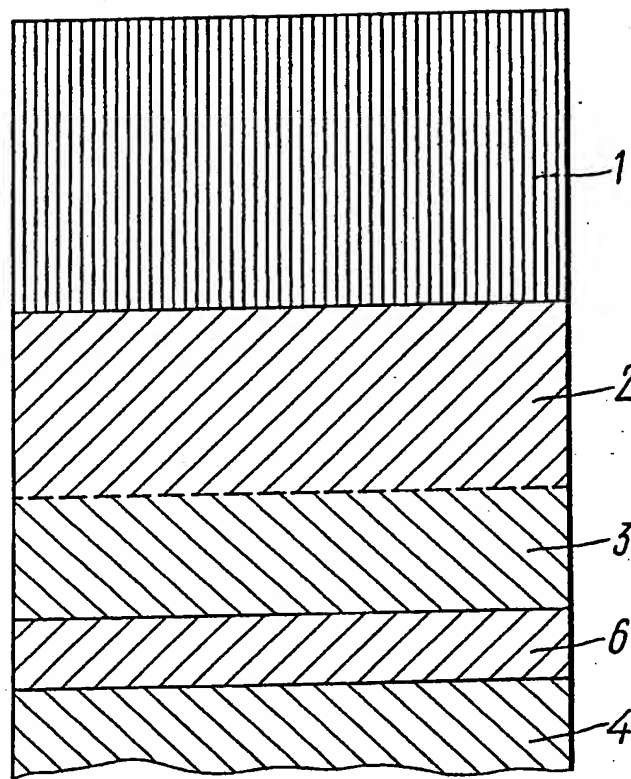

FIG.1

GB 2 252 567 A

FIG.1

FIG.2

FIG.3

METAL/CERAMIC PROTECTIVE COATING FOR
SUPERALLOY ARTICLES

The present invention relates to high-temperature
coatings for metallic materials, and more particularly -
5 to a protective coating of the metal/ceramic type for
articles from superalloys, for example, gas turbine
blades and parts of internal combustion engines.

The claimed invention finds application as a protec-
tive coating on blades and vanes of aircraft and marine
10 gas turbines, hot parts of industrial gas turbines,
for piston crowns of high-power diesel engines, and
parts used in units for the production of synthetic
fuels.

Parts of modern high-temperature equipment made
15 from superalloys, e.g. blades of gas turbines, in the
process of operation, are subjected to high-temperature
and low-temperature corrosion, as well as to the action
of cyclically changing thermal and mechanical loads.
Compounds of sulfur, sodium salts, chlorides, lead,
20 vanadium impurities, solid particles (carbon) contained
in a gas flow cause growing corrosion and erosion fai-
lures of the working surface of non-protected parts.

Known in the art is a monolayer metal coating com-
posed of M-Cr-Al-Y (where M is nickel, cobalt, iron
25 taken separately or in combination).

A tendency to an increase of power, economy and
ecological purity of modern engines and units has led to
an increase of temperature of a gas flow (over $1,300^{\circ}C$)

and, accordingly, to a rise of working temperature of cooled parts. In connection with this, employment of the existing types of monolayer metal coatings becomes low efficient because of their fast failure, corro-

5 sion and erosion.

The effect of an aggressive high-temperature gas flow on a superalloy can be limited by developing thermal barrier coatings of the metal/ceramic type. Structurally, such coatings represent a two-layer system

10 in which an oxidation-resistant layer composed of M-Cr-Al-Y is applied onto a protected part made from a superalloy; an outer ceramic layer made from a low heat-conducting oxide (as a rule, on the basis of stabilized zirconia) is applied onto the first layer.

15 A low heat conduction of the outer ceramic layer (by an order lower than that of the metal oxidation-resistant layer and of the superalloy - the part's material) in the employment of thermal barrier coatings makes it possible to lower the temperature of the

20 part's metal, thus enhancing its life time or, maintaining the temperature of the metal's surface at the same level, to increase the temperature of gas, thereby increasing the engine power.

The basic functions of the oxidation-resistant

25 layer in the two-layer thermal barrier coating of the metal/ceramic type reside in protection against oxidation and corrosion and providing an adhesive contact

with ceramics, while those of the outer ceramic layer
reside in limiting the heat flow coming from the com-
bustion products to the material of a part, preventing
access of the aggressive gas-slag medium to the surface

5 of the oxidation-resistant layer and in protecting it
against erosion damage. — — —

The main difficulty on the way of broad employment
of coatings of the metal/ceramic type is an insufficiently
niga thermal cyclic life time (thermal shock resistance)

10 of such coatings, ile. ability of the outer ceramic layer
to endure cyclic temperature changes without delamina-
tion.

Residual stresses occurring due to mismatch between
coefficients of thermal expansion of the outer ceramic

15 layer $(\alpha_{ZrO_2}$ $10 \cdot 10^{-6}{}^{o}C^{-1})$ and oxidation-resistant layer
$(\alpha_{M-Cr-Al-Y}$ $13-15 \cdot 10^{-6}{}^{o}C^{-1})$ can lead to spalling of
ceramics. Known in the art is a protective coating and
a method of its obtaining (plasma spraying) in which,
in order to decrease residual stresses occurring due to

20 mismatch between coefficients of thermal expansion of
ceramics and metal, transition from the oxidation-resis-
tant layer to the outer ceramic one occurs stepwise, i.e.
the content of the oxide phase varies from 0 (at the
surface of the oxidation-resistance layer M-Cr-Al-Y)

25 to 100% (at the surface of the outer ceramic layer). In
the course of operation of the abovementioned coating,
oxidation of metal particles present in a ceramic matrix

is accompanied by expansion of their volume and finally results in a failure of the ceramic layer.

To prevent polymorphic transformations in the ceramic layer of zirconia (accompanied by considerable volumetric changes and cracking), use of yttria as a stabilizing oxide is most preferable owing to its high thermal stability, as compared with other oxides.

As a rule, the content of yttria in zirconia equals 6 - 20% by mass. The data available testify to the fact tnat the highest thermal shock resistance of ceramic coatings is attained at introducing 6-8% by mass of yttria in zirconia.

The key role in ensuring a high thermal cyclic life time of the outer ceramic layer is played by its microstructure, which is determined by a method of deposition of coatings.

For plasma-sprayed coatings characteristic is a lamellar microstructure of the outer ceramic layer. Coatings obtained by evaporation and condensation in vacuum have a microstructure in the form of columnar grains orientated along the normal to the surface on which they are deposited. It has been established that in its ability for resistance without failure of deformation and for relaxation of arising stresses, as well as in thermal shock resistance, the vapor-deposited ceramic coatings surpass those obtained by plasma-spraying.

Known in the art is a thermal barrier coating

which is a two-layer system obtained by electron-beam
evaporation and vapour-deposition in vacuum. An outer
ceramic layer from yttria-stabilized zirconia, 125 μm
thick, applied over the oxidation-resistant layer

5 (Ni - 23% by mass Co - 18% by mass Cr - 12.5% by mass
Al - 0.3% by mass Y), owing to its microstructure, sur-
passes in thermal shock resistance a similar plasma-
sprayed coating more than 20 times. Deposition of the
outer ceramic layer is done on an alumina layer (Al_2O_3),

10 0.25-2.5 μm thick, preliminarily formed by oxidizing
the oxidation-resistant layer (Ni-Co-Cr-Al-Y), which
increases adhesion bond between the oxidation-resistant
layer and the outer ceramic layer owing to processes
of solid solubility.

15 Along with a high deformation ability, the vapour-
deposited ceramic coatings have a disadvantage, connected
with the fact that the surrounding medium can penetrate
through intercolumnar gaps to the surface of the oxidation-
resistant layer, rendering it oxidized and corroded.

20 It has been established that the main reason for
delamination and spalling of the outer ceramic layer is
oxidation of the surface of the oxidation-resistant layer,
formation and growing of a layer of alumina Al_2O_3 on
the metal/ceramic interface. At reaching a definite

25 critical thickness, the layer of alumina Al_2O_3 starts
delamination at thermal cycles, under the action of high
compressive stresses, from the surface of the oxida-

tion-resistant layer M-Cr-Al-Y and spalling together with the outer ceramic layer.

It is an object of the present invention to create such a protective coating of the metal/ceramic type for

5 articles made from superalloys which possesses an enhanced thermal cyclic and corrosion life time.

The above object is accomplished due to the fact that claimed is a protective coating of the metal/ceramic type for articles made from superalloys, which is a

10 multilayer system containing an outer ceramic layer on the basis of metal oxides and an oxidation-resistant layer from the alloy M-Cr-Al-Y, where M is Ni, Co, Fe, taken separately or in combination, with the content of aluminium in the oxidation-resistant layer of 7.5-14.0%

15 by mass, which, according to the invention, also contains an inner plastic layer from the alloy M-Cr-Al-Y, where M is Ni, Co, Fe, taken separately or in combination, with a content of 2.5-5.5% by mass of aluminium in the inner plastic layer located between the abovemen-

20 tioned system, comprising the outer ceramic layer and the oxidation-resistant layer, and the surface of an article made from a superalloy, the relation of thicknesses of the oxidation-resistant layer and the inner plastic layer being 4.0-1.0.

25 The claimed coating ensures extension of the service life of articles made from superalloys, e.g. blades of gas turbines by 1.5-2.0 times as compared with the

earlier used known two-layer coatings of the metal/ce-
ramic type due to increased thermal stability and rela-
xation ability of the three-layer coating, retardation
of the rate of growing of the layer of alumina Al_2O_3
5   on the metal/ceramic interface.

In case when the outer ceramic layer on the zir-
conia basis contains yttria as a stabilizer, it is re-
commended that the layer should also contain one of dibo-
rides of metals of the subgroup IYa of the Mendeleev's
10 periodic system of elements (titanium diboride, or zir-
conium diboride, or hafnium diboride), with the following
relation of components, % by mass:

$$TiB_2, \text{ or } ZrB_2, \text{ or } HfB_2 \quad - \quad 0.3 - 6.0;$$
$$Y_2O_3 \quad - 5.0 - 25.0;$$
$$ZrO_2 - \text{ the balance.}$$

15

Employment of three-layer coatings having a modified
outer ceramic layer with additions of diboride of a metal
of the subgroup IYa of the Periodic system of elements
renders it possible to increase thermal shock resistance
20 of coatings 2-3 times, as compared with non-modified
outer ceramic layer of the three-layer coatings, and
3-4 times, as compared with the known tow-layer coatings
of the metal/ceramic type.

In case of employment of yttria-stabilized zirconia
25 as an outer ceramic layer, it is also recommended that
it should additionally contain cerium sulfide, with the
following relation of components, % by mass: Ce_2S_3 0.5-5.0;

Y_2O_3 6.0-25.0; ZrO_2 - the balance.

Employment of three-layer coatings with a modified outer ceramic layer, containing cerium sulfide, increases thermal cyclic life time of coatings 1.5-2.5

5 times, as compared with the known two-layer coatings.

It is also desirable that the outer ceramic layer on the yttria-stabilized zirconia basis should contain metallic zirconium in the form of interlayers 0.5-4.0 μm thick, located in the outer ceramic layer parallel to

10 the article surface, the minimum distance between each of the interlayers, as well as the distance between the surface of the oxidation-resistant layer and the nearest to it interlayer of metallic zirconium being equal to 6.0 μm, and the number of interlayers of metal-

15 lic zirconium being equal to at least one.

It is expedient that the outer ceramic layer of the yttria-stabilized zirconia basis should contain at least four interlayers of metallic zirconium, the thickness of each of which being equal to 2.5-3.0 μm, and

20 the distance between each of the interlayers, as well as the distance between the surface of the oxidation-resistant layer and the nearest to it interlayer being equal to 20-23 μm.

The thermal cyclic life time of the three-layer

25 coatings with an outer ceramic layer, containing inter-layers of metallic zirconium, is 2.5-3.5 times higher than that of the known two-layer coatings of the metal/ceramic type.

Besides, it is also possible that the coating should contain a 5-45μm thick aluminide layer with 15-35% by weight aluminium located between the inner plastic layer and the surface of an article made from a superalloy.

Employment of such four-layer coatings for the protection of blades of gas turbines, operating under conditions of sulphide-oxide corrosion, enhances their thermal cyclic and corrosion life time 3-5 times, as compared with the earlier employed known two-layer coatings of the metal/ceramic type.

The invention will be further explained by a detailed description by way of example only, with reference to the accompanying drawings, wherein:

Figure 1 shows an article made from a superalloy with a protective coating applied thereon;

Figure 2 shows an outer ceramic layer of the protective coating shown in Figure 1;

Figure 3 shows a variant of the protective coating;

The protective coating of Figure 1 for articles made from superalloys is a multilayer system, containing an outer ceramic layer 1 on the basis of metal oxides, eg. ZrO_2, Al_2O_3, TiO_2 and Y_2O_3, an oxidation-resistant layer 2 from the alloy M-Cr-Al-Y, where M

is Ni, Co, Fe, taken separately or in combination, with
the content of aluminium in this layer of 7.5-14.0%
by mass, and an inner plastic layer 3 from the alloy
M-Cr-Al-Y, where M is Ni, Co, Fe, taken separately
5   or in combination, with the content of aluminium in
this layer of 2.5-5.5% by mass. The inner plastic
layer 3 is located between the oxidation-resistant
layer 2 and the surface of an article 4 made from a
superalloy. The relation of thicknesses of the oxida-
10 tion-resistant layer 2 and the inner plastic layer 3
is 4.0 - 1.0.

The coating is produced by way of an
electron beam-physical vapour deposition of various
alloys M-Cr-Al-Y and ceramic materials with their vapour-
15 deposition in vacuum on protected articles.

Deposition of coatings is performed by means of
industrial electron-beam units, equipped with multi-
crucible evaporators. The articles to be coated are
placed in special fixtures intended for rotating the
20 articles in a vapour flow of the evaporated material with
a speed of 4-12 rpm. The articles are heated in a vacuum
chamber by an electron beam to a temperature of 830 -
980°C. The temperature of the articles in the process
of deposition of layers of M-Cr-Al-Y depends on the
25 chemical composition of the superalloy from which an
article is made. The pressure of residual gases in the
vacuum chamber is maintained not over $1.3 \cdot 10^{-2}$ Pa.

An ingot of the alloy M-Cr-Al-Y is placed in a

water-cooled crucible of the evaporator. The electron
beam melts the ingot, forming a molten metal pool,
and the vapour flow of the evaporated alloy starts
condensation on the article surface, thus forming a

5   protective coating.

The alloys Ni-Cr-Al-Y and Ni-Co-Cr-Al-Y are widely
used for application of an oxidation-resistant layer
owing to their phase stability. They are used, mainly,
for the protection of blades of aircraft gas turbines,

10   operating at a temperature of the gas exceeding
1,300°C, under conditions of frequent thermal cycles.

The systems of alloys Co-Cr-Al-Y and Fe-Cr-Al-Y
are used for application of coatings operating under con-
ditions of mainly sulfide-oxide corrosion, e.g. on

15   blades of gas turbines of marine power units and on
blades of gas-pumping units.

Application of a coating is started from deposition
on the article's surface an inner plastic layer, con-
taining 2.5-5.5% by mass aluminium from the alloy

20   M-Cr-Al-Y.

The chemical composition of the inner plastic layer
is selected, as a rule, close to that of the oxidation-
resistant layer and differs from the latter only in a
low content of aluminium, approximately corresponding

25   (±0.5% by mass) to the content of aluminium in the
superalloy, from which the article is made. The initial
microstructure of the inner plastic layer must be close

to a single-phase one, i.e. practically, it should
have no β-phase of MAl.

The thickness of the inner plastic layer is deter-
mined by the time of evaporation of the alloy.

5   Employment of a multicrucible evaporator makes it
possible to apply an oxidation-resistant layer of the
alloy M-Cr-Al-Y immediately after obtaining the inner
plastic layer of the necessary thickness without extrac-
tion of articles from the vacuum chamber. The fixtures
10 with articles are moved and placed over another cru-
cible, wherein an ingot of the superalloy M-Cr-Al-Y
was placed preliminarily. After that started is the
process of deposition of the oxidation-resistant layer
of the necessary thickness. The technological para-
15 meters of the process of application of the oxidation-
resistant layer are identical to those employed in
deposition of the inner plastic layer.

The rate of condensation of the inner plastic layer
and oxidation-resistant layer on a rotating article
20 depends on the chemical composition of the alloys
M-Cr-Al-Y and equals 5-8 μm/min.

Upon application of the inner plastic layer and
oxidation-resistant layer, the articles are removed
from the vacuum chamber. Further on, they are subjected
25 to a diffusion heat-treatment in vacuum at a temperature
of 1,040-1,130°C for two hours, shot peening with
metallic microballs, and then - to a repeated diffusion

heat treatment in vacuum for two-four hours at a tempe-
rature of 1,040-1,130°C (depending on the chemical com-
position of the superalloy from which the article is
made).

5   The last stage is the formation, on the surface of
the oxidation-resistant layer, an outer ceramic layer
from yttria-stabilized zirconia. The main technological
operations of articles' preparation are similar to those
described above.

10   The fixtures with articles rotated at a speed of
4-12 rpm are arranged over the crucible of the evaporator,
wherein located are the discs of compacted ceramics of
stabilized zirconia. The temperature of articles in
the course of deposition of the outer ceramic layer is
15 maintained at the level of 850-1,080°C (which is deter-
mined by the chemical composition of evaporated ceramics
and by the chemical composition of the superalloy from
which an article is made).

         Evaporation of ceramics is conducted at a rate of
20 0.9-3.5 μm/min. The outer ceramic layer consists of
columnar grains and has a general porosity of 16-20%.
The time of evaporation of the outer ceramic layer deter-
mines its necessary thickness on an article depending
on functional tasks.

25   It has been established that introduction of the
inner plastic layer M-Cr-Al-Y, containing 2.5-5.5% by
mass aluminium, between the oxidation-resistant layer

M-Cr-Al-Y, containing 7.5-14.0% by mass aluminium, and the superalloy from which an article is made, considerably (2-4 times) increases thermal cyclic life time of the coating owing to retardation of the rate of

5 growth of a layer of scale Al_2O_3, which is formed on the surface of the oxidation-resistant layer on the metal/ceramic interface, and relaxation of thermal stresses occurring in the three-layer system.

The obtained effect of increasing the thermal

10 cyclic life time of the three-layer coating, as compared with the known two-layer coating, is explained by the following mechanism:

- presence of the inner plastic layer retards the interdiffusion action of the oxidation-resistant

15 layer with the superalloy, the thickness of the diffusion zone, formed between them, being lowered. This considerauly enhances thermal stability of the oxidation-resistant layer. A lower diffusion mobility of elements of tne oxidation-resistant layer facilitates retarda-

20 tion of the rate of growth of a layer of alumina Al_2O_3;

- owing to its high plasticity because of a low content of aluminium, the inner plastic layer ensures relaxation of thermal stresses occurring at the metal/ceramic interface. In the long run, this increases the

25 thermal cyclic life time of the coating.

The necessity of ensuring the maximum possible oxidation resistance and corrosion resistance of the

oxidation-resistant layer requires the presence of
chromium (up to 24-26% by mass) and aluminium (up to
12-14% by mass in it) . However, at such amounts of
these metals, resistance of thermal fatigue the alloys
5 M-Cr-Al-Y is lowered, especially so when the content of
aluminium exceeds 14% by mass as a result of a temperature
rise of the dictile-brittle temperature transition. Intro-
duction of the inner plastic layer makes it possible to
improve thermoplastic characteristics of the three-layer
10 system. Owing to the ability of the inner plastic layer
to retard thermal fatigue microcracks originating in
the oxidation-resistant layer, the resistance of articles
provided with such coatings to thermal fatigue is inc-
reased.

15 The necessary level of resistance to oxidation and
corrosion is ensured at the introduction of 7.5-14%
by mass aluminium into the oxidation-resistant layer.
When the content of aluminium in the oxidation-resistant
layer is less then 7.5% by mass, its resistance to
20 oxidation at the operating temperature of over 1,000°C
sharply drops.

The minimum content of aluminium in the inner plas-
tic layer is 2.5% by mass, which is brought about by the
fact that at lower amounts of it the exchange diffusion
25 processes between the inner plastic layer and oxidation-
resistant layer start to proceed intensitvely. The
inner plastic layer loses the function of a diffusion

barrier, which lowers the effect of its employment.

With a content of aluminium in the inner plastic
layer in excess of 5.5% by mass, due to a drop of plas-
ticity, it loses relaxation properties, as a result of

5 which its positive effect on the thermal cyclic life time
vanishes.

The content of aluminium in the amount of 2.5-5.5%
by mass in the inner plastic layer ensures a better ther-
mal stability of the oxidation-resistant layer, as

10 compared with the known two-layer coating of the metal/ce-
ramic type. The growth of a layer of alumina Al_2O_3 is
retarded and relaxation of thermal stresses occurring
in the coating is facilitated, owing to which fact the
thermal cyclic life time of the three-layer system is

15 extended.

The outer ceramic layer of the three-layer coating,
having a columnar microstructure with intercrystalline
pores, is permeable for the surrounding oxidation medium.
Owing to a decreased gas permeability of the outer ceramic

20 layer, there appears a possibility to retard the rate
of growth of the layer alumina Al_2O_3 and to increase
the thermal stability of the protective coating.

Various oxides, such as e.g. CaO, MgO, CeO_2 and
Y_2O_3 can be used as stabilizers of zirconia. In case of

25 its stabilization by yttria, in order to decrease gas
permeability of the outer ceramic layer, introduced
into it is one of diborides of the metals of subgroup IVa

of the Periodic system of elements, with the following relation of the abovementioned components, % by mass: TiB_2 or ZrB_2 or HfB_2 0.3-6.0; Y_2O_3 5.0-25.0; ZrO_2 the balance.

5   Application of the coating is performed similarly to that described above, the only difference being that the evaporated ceramic discs contain a preliminarily introduced diboride of the metal of subgroup IVa of the Periodic system of elements.

10   The technology of producing ceramic discs is the following: the initial powders ZrO_2, Y_2O_3 and (TiB_2 or ZrB_2 or HfB_2), taken in the necessary per cent proportion, are mixed and compacted.

     The temperature of an article in the process of

15 application of the outer ceramic layer is at the level of 850-1,080°C and is determined by the chemical composition of ceramics and superalloy, from which the article is made.

     The deposited outer ceramic layer ZrO_2 - Y_2O_3 -

20 (TiB_2 or ZrB_2 or HfB_2) has disperse particles of the introduced diboride uniformly distributed throughout the entire volume of ceramics, said particles being mainly released along the borders of columnar crystallines.

25   In the course of operation of the coated articles, at heating the outer ceramic layer over 900°C, there occurs oxidation of diboride particles with the forma-

tion of molten boric anhydride B_2O_3 in the form of
accumulations of a vitreous film along the borders of
columnar crystallines, microcracks and pores. This film
creates a diffusion barrier for penetration of the aggres-

5   sive medium along the borders of columnar crystallines
through the outer ceramic layer. Its gas permeability
is decreased, the growth of a layer of alumina Al_2O_3
on the metal/ceramic interface is retarded, as a result
of which the general tnermocyclic life time is increased.

10   Besides, owing to a modifying effect of diborides,
the microstructure of the outer ceramic layer becomes
more disperse. The number of columnar crystallines
is increased, while the size of the cross section of a
single crystalline is decreased. This impedes the spread

15   of microcracks in the outer ceramic layer, appearing
unaer the action of thermal stresses.

         The percentage of ingredients of the outer ceramic
layer is determined by the operating conditions of
articles and chemical composition of the oxidation-

20   resistance layer.

         With a content of diboride of one of the metals of
subgroup IVa of the Periodic system of elements less
than 0.3 and more than 6.0% by mass, the positive effect
of increasing thermal stability practically boiled down to

25   a minimum. This is associated with the fact that with
a content of titanium diboride (or zirconium diboride
or hafnium diboride) in excess of 6.0% by mass, there

occurs an increase of the volume fraction of diboride par-
ticles released in the ceramic matrix, their size is
increased, bringing about the appearance of microgaps
in the outer ceramic layer. With a content of one diboride
5 of the metals of subgroup IVa of the Periodic system of
elements less then 0.3% by mass, the amount of released
disperse particles is too small for creating diffusion
barriers on the way of the oxidation medium in the outer
ceramic layer.

10   Lowering of gas permeability in the outer ceramic
layer from yttria-stabilized zirconia can also be attained
at introducing cerium sulfide in it, with the following
percentage of components, % by mass: Ce_2S_3 0.4-5.0;
Y_2O_3 6.0 - 25.0; ZrO_2 - the balance.

15   Application of the coating is performed similarly
to that described above, the only difference being that
the evaporated ceramic discs contain cerium sulfide intro-
duced preliminarily.

        Taken in the necessary percentage, the initial pow-
20 ders of zirconia, yttria and cerium sulfide are mixed
and compacted into ceramic discs.

        The temperature of an article in the process of
application of the outer ceramic layer is at the level
of 850 - 1,080°C and is determined by the chemical com-
25 position of ceramics and superalloy from which the article
is made.

        The positive effect of cerium sulfide resides in
ensuring the formation of dense intercrystalline inter-

faces of the outer ceramic layer. Acting as a plasti-
cizing phase that reduces microhardness of the outer
ceramic layer, cerium sulfide noticeably makes the
structure finer and increases uniformity of axes of
5 columnar crystallines, due to which fact they grow to-
gether more closely. There are no discontinuities along
intercrystalline interfaces. As a result, gas permeabi-
lity of the outer ceramic layer becomes less, the
growth of a layer of alumina Al_2O_3 is retarded, and
10 thermal shock resistance of the outer ceramic layer
is increased.

With the content of cerium sulfide in the outer
ceramic layer less than 0.5% by mass, a sufficiently
dense intergrowth of columnar crystallines is not en-
15 sured, whereas with the amount of it in excess of 5.0% by
mass, the structure of the outer ceramic layer becomes
excessively dense. Microcracks appear in the outer cera-
mic layer which decrease resistance to oxidation and
thermal shock resistance of the coating.

20 Further increase of thermocyclic life time of the
outer ceramic layer owing to lowering of gas permeabi-
lity is asociated with a change (violation) of its
columnar structure.

This is accomplished by that the outer ceramic
25 layer I (Fig. 2) applied on the oxidation-resistant
layer 2, also contains at least one interlayer 5 of metal-
lic zirconium with a thickness of 0.5-4.0 μm arranged

parallel to the article, the distance 1 between each
of interlayers 5 of metallic zirconium and the distance l_1
between the surface of the oxidation-resistance layer 2
and the interlayer 5 of metallic zirconium, nearest to
5 the layer 2, must equal 6 μm, or more.

     -     Introduction of interlayers 5 from metallic zir-
conium makes it possible to increase thermal cyclic
life time of three-layer coatings. Especially effi-
cient is introduction of such interlayers into the
10 outer ceramic layer from yttria-stabilized zirconia
with a modifying addition of one of diborides of metals
of subgroup IVa of the Periodic system of elements, or
cerium sulfide.

     Application of the coating is performed according
15 to the tecnnology described above, the only difference
being that in the deposition of the outer ceramic
layer I, periodically (depending on the required amount
of interlayers 5 of metallic zirconium) stopped is eva-
poration of ceramics and displaced is the fixture with
20 articles, which is arranged over the crucible that
contains metallic zirconium. Zirconium is melted by
means of an electron beam and an interlayer 5 of the
required thickness is deposited. Then evaporation of
metallic zirconium is stopped, the fixture with articles
25 is displaced and located over the ceramics, and deposition
of tne outer ceramic layer I is resumed. After a definite
period of time (required for application of the outer

ceramic layer with a thickness equal to the distance 1
between the neighbouring interlayers) the whole technolo-
gical·cycle of deposition of the next interlayer 5 of
metallic zirconium is repeated.

5   Introduction of interlayers of metallic zirconium
breaks the columnar structure of grains and decreases
porosity of the outer ceramic layer. Owing to this, gas
permeability of the outer ceramic layer is lowered,
while the rate of formation and growth of a layer of
10 alumina Al_2O_3 on the metal/ceramic interface is retarded.
       In the course of operation of an article with the
claimed coating, as a result of penetration of an oxi-
dizing medium, there occurs a subsequent (beginning
from the interlayer nearest to the surface of the outer
15 ceramic layer) oxidation of interlayers of metallic zir-
conium and their transformation into interlayers of zir-
conia. The interlayers of zirconia, tnus formed, serve as
barriers on the way of penetration of an aggressive gas
medium and retard the process of oxidation and corrosion
20 of the oxidation-resistant layer. Thereby, accomplished
are retardation of the rate of growth of a layer of alu-
mina Al_2O_3 and extension of the thermal cyclic life time
of the coating. An interval of thickness of each of the
interlayers 5 of metallic zirconium of 0.5-4.0 μm is
25 determined by the type and conditions of operation of
an article made from a superalloy, as well as by the
thickness of the outer ceramic layer. At a thickness

of the interlayer exceeding 4.0 μm, a probability arises
of appearance of a local separation of ceramics from
metallic zirconium in the process of operation. At a
thickness of the interlayer of metallic zirconium less
5   than 0.5 μm, the effect from their introduction into the
outer ceramic layer sharply drops, since they are already
not a sufficiently effective barrier on the way of the
oxidation medium owing to its small thickness.

If the distance between interlayers of metallic zir-
10 conium and the distance between the surface of the oxi-
dation-resistant layer and the interlayer nearest to
it becomes less then 6 μm, a danger appears of dela-
mination of the outer ceramic layer at thermal cycles
because of the appearance of considerable thermal
15 stresses in the outer ceramic layer.

The number of introduced interlayers 5 is determined
by the geometry of the surface and operating condi-
tions of an article subjected to coating, as well as by
the thickness of a single interlayer and the thickness
20 of the outer ceramic layer.

For the articles of a complex shape with inner ca-
vities, with a view to enhance resistance to oxidation
and thermalc cyclic life time, offered is a multilayer
coating, containing in addition to the abovementioned
25 outer ceramic layer I (Fig. 3), the oxidation-resistant
layer 2 and the inner plastic layer 3, an aluminide layer 6,
with the thickness of 5-45 μm, having 15-35% by mass
aluminium and located between the superalloy from which

the article 4 is made, and the inner plastic layer 3.
The aluminide layer 6 is produced by a diffusion sa-
turation, as well as by means of other known technolo-
gies.

5   The technology of deposition of a three-layer
coating on the surface of an article made from a super-
alloy, having an aluminide layer, does not differ from
that described above.

A positive effect of the aluminide layer is brought
10   about, first of all, by reducing thermal stresses in
the oxidation-resistant layer on the metal/ceramic in-
terface, which enhances the thermal cyclic life time
of the coating. This is accomplished owing to the appea-
rance in the aluminide layer, when cooled, residual comp-
15   ressive stresses, since its coefficient of thermal ex-
pansion is lower than that of the superalloy. When
the oxidation-resistant and inner plastic layers are
cooled, residual tensile stresses appear in these
layers, since their thermal coefficient of linear ex-
20   pansion is greater than that of the superalloy. As a
result of a mutual compensation, the general level of
stresses in such four-layer system is lowered, which fa-
cilitates the increase of the thermal cyclic life time
of the coating.

25   Resides, the aluminiae layer acts an an additional
diffusion barrier, materially limiting tne diffusion in-
teraction of the three-layer coating with the superalloy,
which increases the thermal stability and life time of
the coating.

The maximum content of aluminium in the aluminide
layer (35% by mass) is determined by the fact that
exceeding of this level leads to worsening of mecha-
nical characteristics of the superalloy, in the first
5 place, of the thermal fatigue ones.

. The minimum value of content of aluminium in the
aluminide layer (15% by mass) is associated with the
fact that at a lower concentration the aluminide layer
lowers its oxidation resistance at a temperature exceed-
10 ing 950°C. At a thickness of the aluminide layer less
than 5 μm, its action practically is not felt because
of inability to redistribute residual stresses.

At a thickness over 45 μm the aluminide layer may
start cracking because of considerable compressive
15 stresses acting therein.

Employment of the coating to protect blades
of a gas turbine of a marine power unit operating at a
temperature over 920°C under conditions of a sulfide-
oxide corrosion makes it possible to extend their service
20 life almost twice, as compared with two-layer metal/ce-
ramic coatings employed ealier.

Employment of three-layer coatings with an outer
ceramic layer from yttria-stabilized zirconia, contai-
ning stabilizing additions (one of diborides of the
25 metals of subgroup IVa of the Periodic system of elements
or cerium sulfide) to protect blades of an aircraft gas
turbine operating at a temperature of a gas flow of

1,300°C-plus makes it possible to increase their
thermal cyclic life time three times in comparison
with blades protected by the known two-layer metal/ce-
ramic coating.

5   Application of three-layer coatings with an outer
ceramic layer containing interlayers of metallic zir-
conium on piston crowns of an adiabatic diesel engine
with an elevated temperature of fuel combustion products
increases their thermal cyclic life time 3.5 times, as
10 compared with piston crowns protected by the known two-
layer metal/ceramic coating.

      Employment of the coating, having an alu-
minide layer, on blades of gas turbines operating
under conditions of a sulfide-oxide corrosion, extends
15 their thermal cyclic and corrosion life time four times,
as compared with the known two-layer coatings of the
metal/ceramic type.

      Given below are concrete examples, illustrating
the invention.

20   EXAMPLE I. A three-layer coating of the metal/cera-
mic type, containing an inner plastic layer Ni - 17.2% by
mass Cr - 5.5 % by mass Al - 0.1% by mass Y, 50μm
tnick, an oxidation-resistant layer Ni - 17.4% by
mass Cr - 14.0% by mass Al - 0.1% by mass Y, 50 μm
25 thick, and an outer ceramic layer ZrO_2 - 8% by mass
and Y_2O_3, 100 μm thick, is applied on a group of blades
of an aircraft gas turbine (the length of the blade
fin is 90 mm) made from an alloy, containing, % by mass:

Cr 8.0 - 9.5; W 9.5 - 11.0; Co 9.0 - 10.5; Al 5.1 - 6.0;
Mo 1.2 - 2.4; Ti 2.0 - 2.9; Nb 0.8 - 1.2 ; Fe ⩽ 1.0;
C 0.13 - 0.22; Ni - the balance.

Application of the coating is performed by means
of an industrial electron-beam unit on blades rotating
in a vapour cloud of the evaporated material at a speed
of . 6 rpm. Deposition of the inner plastic and oxida-
tion-resistant layers is performed by way of a succes-
sive electron-beam evaporation of ingots 68.5 mm in
diameter made from the alloys Ni-Cr-Al-Y of the res-
pective chemical composition. The temperature of heat-
ing the blades in the process of deposition of metallic
layers of the coating is $830\pm25^{\circ}C$, the rate of condensation
of the layers Ni-Cr-Al-Y being $5.8\,\mu m/min$. The vacuum
in the working chamber should not exceed $I.3\cdot10^{-2}$ Pa.

Upon application of the inner plastic and oxida-
tion-resistant layers, the blades are subjected to a
diffusion heat treatment in vacuum at a temperature of
$1,040^{\circ}C$ during 2 hours, after which, in order to obtain
a dense, non-porous structure of the oxidation-resis-
tant layer, they are subjected to shot peening with
steel microballs $200\,\mu m$ in diameter. Next, the blades
are subjected to a repeated diffusion heat treatment
in vacuum at a temperature of $1,040^{\circ}C$ during 2 hours.

Application of the outer ceramic layer on the blades
having the layers Ni-Cr-Al-Y is performed by way of an
electron-beam evaporation of ceramic discs 68.5 mm in

diameter. In the process of deposition of ceramics, the temperature of blades is maintained at the level of $950\pm25^{\circ}C$, the rate of deposition of the outer ceramic layer being $1.9\,\mu m/min$, and vacuum in the working cham-

5 ber being not in excess of $1.3\cdot10^{-2}$ Pa. Upon application of the outer ceramic layer, the blades are subjected to a diffusion heat treatment in vacuum at a tempe-rature of $1,050^{\circ}C$ during 2 hours. The general porosity of the outer ceramic layer, as measured by a gravimetric

10 method is 19%, and an average diameter of a single co-lumnar grain is $4.3\,\mu m$.

Thermal cyclic tests of the coated blades are per-formed in the open by way of heating them to a tempe-rature of $1,100^{\circ}C$ during 3 minutes, keeping them at

15 this temperature during 5 minutes, and cooling to a tem-perature of $100^{\circ}C$ during 0.5 minute. Appearance of the first cracks and spalling of the outer ceramic layer is considered a failure of the coating.

For the purpose of comparison, subjected to testing

20 are the blades with a two-layer coating of the metal/ce-ramic type, including an oxidation-resistant layer Ni - 17.3% by mass Cr - 14.0% by mass Al - 0.1% by mass Y, $100\,\mu m$ thick, and an outer ceramic layer ZrO_2 - 8% by mass Y_2O_3, $100\,\mu m$ thick. The technological parameters

25 of application of coatings are similar to those employed in application of three-layer coatings.

The average thermal cyclic life time of the blades with a three-layer coating is over 70 thermal cycles

(without failure) and that of the blades with two-layer coatings is only 23 thermal cycles.

EXAMPLE 2. A three-layer coating of the metal/ceramic type, including an inner plastic layer Co - 24.0%
5   by mass Cr - 4.3% by mass Al - 0.1% by mass Y, 25 μm thick, an oxidation-resistant layer Co - 28.0% by mass Cr - 10.2% by mass Al - 0.1% by mass Y, 100 μm thick, and an outer ceramic layer ZrO_2 - 12% by mass Y_2O_3, 180 μm thick, is applied onto cylindrical
10 samples 7 mm in diameter (the length of the working part of the samples is 60 mm) made from a superalloy of the following composition, % by mass: Cr - 18.0; Co - 5.6 ; Al - 4.5; W - 4.0; Mo - 4.0; Ti - 2.6; Fe - 2.3; Ni - the balance.
15   Deposition of the coating is performed according to the technology described in Example 1. The general porosity of the outer ceramic layer is 21%.

Tests for thermal shock resistance are conducted in the open, observing the following conditions: heating
20 of the coated samples to a temperature of 1,100°C during 4 minutes, keeping them at the maximum temperature during 20 minutes, and cooling by a flow of air to a temperature of 40°C during 6 minutes. Spalling of the outer ceramic layer on an area of 50% of the sample
25 surface is considered a failure of the coating.

The thermal cyclic life time of the samples with a three-layer coating is 175 thermal cycles, whereas the samples made from the similar alloy with a two-layer

coating, including an oxidation-resistant layer Co -
28.0% by mass Cr - 10.1% by mass Al - 0.1% by mass Y,
125 μm thick, and an outer ceramic layer ZrO_2 - 12% by
mass Y_2O_3, 180 μm thick, applied with the use of the
5 same technological parameters, endure only 90 thermal
cycles.

Tests of the samples with two-layer and three-layer
coatings for oxidation resistance (oxidation in the
open at a temperature of 1,000°C) during 500 hours
10 show that the thickness of a layer of alumina Al_2O_3
formed at the metal/ceramic interface of the three-layer
coatings is 2.0 μm, while in the two-layer coatings it
is equal to 3.0 μm.

The thickness of a diffusion zone between the oxi-
15 dation-resistant layer and the inner plastic layer of
the three-layer coatings 20 μm, and of thet between the
oxidation-resistant layer and the superalloy of the
two-layer coating - 45 μm.

EXAMPLE 3. A three-layer coating of the metal/ce-
20 ramic type, including an inner plastic layer Co - 24.8%
by mass Cr - 4.0% by mass Al - 0.1% by mass Y, 40 μm
thick, an oxidation-resistant layer Co - 26.9% by
mass Cr - 11.7% by mass Al - 0.1% by mass Y, 50 μm thick,
and an outer ceramic layer ZrO_2 - 12% by mass CeO_2,
25 110 μm thick, is applied onto wedge-shaped samples,
simulating a leading edge of a blade (the leading edge
corner radius of the samples being 0.7 mm, height -
80 mm, length - 43-47 mm) made from a superalloy of the

composition given in Example 2, on whose surface on aluminide layer (30% by mass Al), 30 μm thick, was applied earlier by the gas-phase deposition method.

The technology of deposition of the three-layer
5   coating is similar to that described in Example 2.

The rate of condensation of metallic layers of the coating is 5.0 μm/min, and that of the outer ceramic layer - 2.2 μm/min. The general porosity of the outer ceramic layer is 23%.

10   The samples are subjected to thermal cyclic tests on a gas-dynamic stand in the diesel fuel combustion products, containing 0.25% by mass sulfur. The maximum temperature of the blade leading edge of the samples is 1,000°C. The time of heating up to this temperature
15   is 60 s., the time of cooling down to a temperature of 400°C is 70 s. The amplitude of thermal stresses (a sum of tensile and compressive stresses), owing to diffe- rent length of the samples, is equal to 815-955 MPa.

The formation of a thermal fatigue crack, 0.5 mm long,
20   on a leading edge is considered a start of the coating failure, while the life time is determined by the number of thermal cycles up to the formation of such a crack.

The thermal cyclic life time of the three-layer coatings is 790 thermal cycles, whereas the wedge-
25   shaped samples with an aluminide layer, 30 μm thick, carrying a two-layer vapour-deposited overcoating, including an oxidation-resistant layer 90 μm thick, similar in composition to the oxidation-resistant layer

of the three-layer coating mentioned above, and an outer ceramic layer ZrO_2 - 12% by mass CeO_2, 100 μm thick, could endure only 400 thermal cycles.

A metallographic analysis of the failed samples

5   has shown that the thickness of a layer of alumina Al_2O_3 which forms on the metal/ceramic interface of the three-layer coatings, does not exceed 2.5 μm, which is almost 1.5 times less in comparison with the thickness of a layer of alumina Al_2O_3 that forms

10   in two-layer coatings.

EXAMPLE 4. A three-layer coating of the metal/ceramic type, including an inner plastic layer Ni - 10.5% by mass Co - 17.4% by mass Cr - 4.8% by mass Al - 0.2% by mass Y, 40 μm thick, an oxidation-resistant layer

15   Ni - 11.2% by mass Co - 18.7% by mass Cr - 8.0% by mass Al - 0.1% by mass Y, 60 μm thick, and an outer ceramic layer ZrO_2 - 6% by mass Y_2O_3, 95 μm thick, is applied on small-size (the length of the blade fin is 25 mm) blades of an aircraft gas turbine from a superal-

20   loy, including, % by mass: Cr 10.0 - 12.0; Al - 5.0- 6.0; W 4.5 - 5.5 ; Co 4.0 - 5.0; Mo 3.5 - 4.8; Ti - 2.5- 3.2; Fe 2.0; C - 0.1 - 0.2 and Ni- the balance.

The technology of application of the coating is similar to that described in Example 1, the only dif-

25   ference being that the temperature of the samples in the process of deposition of the outer ceramic layer is 920 ± 25°C.

The rate of condensation of metallic layers of the coating is 5.6 μm/min, and that of the ceramic layer - 1.5 μm/min.

The thermal cyclic tests of the blades are conduct-
5 ed under conditions similar to those described in Example 2.

The thermal shock resistance of the claimed three-layer coatings is 460 thermal cycles, which is 1.7 times higher in comparison with the thermal shock resistance
10 of the known two-layer coatings, including an oxidation-resistant layer, 100 μm thick, and an outer ceramic layer, 95 μm thick, similar in composition and conditions of application to the same system of a three-layer coating.

15 The thickness of a layer of alumina Al_2O_3 in a three-layer coating of the tested samples is 2.0 μm, and that in a two-layer coating - 2.5 μm.

EXAMPLE 5. A three-layer coating, including an inner plastic layer Ni - 15.0% by mass Cr - 4.2% by
20 mass Al - 0.1% by mass Y, 40 μm thick, an oxidation-resistant layer Ni - 17.8% by mass Cr - 10.7% by mass Al - 0.1% by mass Y, 50 μm thick, and an outer ceramic layer Al_2O_3 - 10% by mass ZrO_2, 80 μm thick, is applied on the samples made from a superalloy (the shape of
25 the samples and composition of the superalloy are given in Example 2).

Deposition of the coating is performed according to

the technology described in Example 1. The temperature
of the samples in the process of deposition of the
outer ceramic layer is $990 \pm 25^\circ C$, the rate of conden-
sation of the outer ceramic layer - $1.2 \mu m/min$.

5   The methods of testing for thermal shock resis-
tance are described in Example 2.

The thermal cyclic life time of the samples with
a three-layer coating is 58 thermal cycles, whereas the
samples made from the similar alloy with a two-layer

10   coating, including an oxidation-resistant layer Ni -
17.7% by mass Cr - 10.6% by mass Al - 0.1% by mass
Y, $90 \mu m$ thick, and an outer ceramic layer Al_2O_3 - 10%
by mass ZrO_2, applied under the same tecnological para-
meters endure only 37 thermal cycles.

15   EXAMPLE 6. A coating of the metal/ceramic type,
including an inner plastic layer Fe - 20.2% by mass
Ni - 16.1% by mass Cr - 2.5% by mass Al - 0.1% by mass
Y, $30 \mu m$ thick, an oxidation-resistant layer Fe - 27.3%
by mass Cr - 7.5% by mass Al - 0.1% by mass Y, $60 \mu m$

20   thick, and an outer ceramic layer ZrO_2 - 20% by mass
Y_2O_3, $125 \mu m$ thick, is applied on the cylindrical samples,
described in Example 2, made from a superalloy of the
following composition, % by mass: Ni - 33-37; Cr 14-16;
W 2.8 - 3.5 ; Ti 2.4 - 3.2 ; Al 0.7 - 1.4; Mn ≤ 0.6;

25   Si ≤ 0.6; S ≤ 0.02; P ≤ 0.035; B ≤ 0.02;   C ≤ 0.08;
Fe - the balance.

The technological parameters of application of
the coating are similar to those described in Example 1.
The general porosity of the outer ceramic layer is 22%.
The thermal cyclic tests are performed under condi-

5   tions described in Example 2.

The thermal shock resistance of the three-layer
coating is 180 thermal cycles, which is 1.8 times
higher than that of the two-layer coating of the
metal/ceramic type, having an oxidation-resistant

10   layer with a thickness of 90 μm and an outer ceramic
layer with a thickness of 125 μm, whose compositions
are similar to those of the three-layer system.

EXAMPLE 7. Applied on the samples made from a
superalloy, whose composition and dimensions are similar

15   to those described in Example 2, is a three-layer vapour-
deposited coating of the metal/ceramic type, including
an inner plastic layer Ni - 17.4% by mass Cr - 3.7%
by mass Al - 0.1% by mass Y, 35 μm thick, an oxidation-
resistant layer Ni - 17.9% by mass Cr - 10.3% by

20   mass Al - 0.1% by mass Y, 60 μm thick, and an outer
ceramic layer ZrO_2 - 8% by mass Y_2O_3 - 1.6 by mass
TiB_2, 90 μm thick.

The technological parameters of deposition of the
three-layer coating are similar to those described in

25   Example 1. Application of the outer ceramic layer by
way of an electron beam evaporation of the ceramic
material, containing · zirconia, yttria and titanium

diboride, preliminarily mixed and compacted into discs
68.5 mm in diameter, located in one of the crucibles of
the evaporator of the electron-beam unit.

The rate of condensation of metallic layers of
5   the coating is 5.9 μm/min, and that of the outer ceramic
layer - 2.5 μm/min. The general porosity of the outer
ceramic layer is 17%, the average diameter of a single
columnar grain is 2.2 μm.

The tests for thermal shock resistance are performed
10   under conditions described in Example 2.

The thermal shock resistance of the samples with a
three-layer coating, whose ceramic layer contains titanium
diboride, is 710 thermal cycles, while that of a three-
layer coating without titanium diboride in the outer
15   ceramic layer is 350 thermal cycles; the thermal shock
resistance of a two-layer coating, including an oxida-
tion-resistant layer Ni - 17.7% by mass Cr - 10.3% by
mass Al - 0.1% by mass Y, 95 μm thick, and an outer
ceramic layer ZrO_2 - 6% by mass Y_2O_3, 90 μm thick, is
20   220 thermal cycles.

The metallographic analysis of the samples tested
for oxidation resistance under conditions described in
Example 2 has shown that the thickness of a layer of
alumina Al_2O_3, which is formed in the three-layer coating
25   with an outer ceramic layer from ZrO_2 - Y_2O_3 - TiB_2 does
not exceed 1.8 μm, which is 1.5 times less than that in
the three-layer coating, whose outer ceramic layer does

not contain titanium diboride, and 1.8 times less than that in the two-layer coating.

EXAMPLE 8. Applied on cylindrical samples made from a superalloy, whose dimension and composition are given

5   in Example 2 and whose surface has a previously deposited aluminide layer, 45 μm thick, containing 15% by mass aluminium, is a three-layer coating, including an inner plastic layer Co -23.3% by mass Cr - 3.1% by mass Al - 0.1% by mass Y, 40 μm thick, an oxidation-resistant

10   layer Co - 27.1% by mass Cr - 11.4% by mass Al - 0.1% by mass Y, 50 μm thick, and an outer ceramic layer ZrO_2 - 5% by mass Y_2O_3 - 6% by mass ZrB_2, 55 μm thick.

The technological parameters of deposition are similar to those described in Example 1. The tempera-

15   ture of the samples in the process of deposition of the outer ceramic layer is 900 $\pm$ 25^{o}C. The rate of condensation of metallic layers of the coating is 5.5 μm/min, and that of the outer ceramic layer - 2.1 μm/min. The general porosity of the outer ceramic layer is 19%, the

20   average diameter of a single grain is 2.8 μm.

The tests for thermal shock resistance have been performed under conditions described in Example 2.

Simultaneously, subjected to testing were the samples with the abovementioned three-layer coating, applied onto

25   samples which had no aluminide layer, the samples with a four-layer coating (including the aluminide layer) , similar in composition and thickness to the coating

described in this Example, in whose composition of the outer ceramic layer there were no zirconium diboride, as well as the samples with a two-layer coating of the metal/ceramic type, containing an oxidation-resistant layer, 90 μm thick, whose composition is similar to that used in the three-layer coating, and an outer ceramic layer ZrO_2 - 5% by mass Y_2O_3, 55 μm thick.

The thermal shock resistance of the four-layer coating with an outer ceramic layer, containing zirconium diboride, is 480 thermal cycles. The same coating, but without an aluminide layer, withstands 422 thermal cycles. The life time of the four-layer coating, whose outer ceramic layer contained no zirconium diboride, is 390 thermal cycles. The least thermal shock resistance (305 thermal cycles) has a two-layer coating of the metal/ceramic type.

EXAMPLE 9. Applied on the wedge-shaped samples made from a superalloy is a four-layer coating of the metal/ceramic type (the form of the samples, composition of the superalloy, composition and thickness of the coating are given in Example 3).

The coating differs only in that the thickness of the aluminide layer is 5 μm (the amount of aluminium is 35% by mass), and in that the outer ceramic layer has a composition ZrO_2 - 8% by mass Y_2O_3 - 1.9% by mass Ce_2S_3.

Application of the coating is performed according to the technology described in Example 1.

Application of the outer ceramic layer is performed
by way of an electron-beam evaporation of a ceramic material, containing zirconia, yttria and cerium sulfide,
preliminarily mixed and compacted into discs 68.5 mm

5   in diameter, which are placed in one of the crucibles
of the evaporator.

The rate of deposition (condensation) of metallic
layers of the coating is 5.9 μm/min, of the outer ceramic
layer - 2.1 μm/min. The general porosity of the outer

10   ceramic layer is 16%, and an average diameter of a
single grain 2.1 μm.

The tests for thermal cycling have been performed
under conditions described in Example 3. The amplitude
of thermal stresses is 565-620 MPa.

15   The thermal cyclic life time of four-layer coatings
equals 1,600 cycles, which is by 550 cycles more than
the life time of the same coating, but without additions
of cerium sulfide into the outer ceramic layer. The
thermal cyclic life time of a three-layer coating (without

20   an aluminide layer), containing cerium sulfide in the
outer ceramic layer, is .920 thermal cycles, and that of a
two-layer coating of the metal/ceramic type (its composition and thickness are given in Example 3, but with
the outer ceramic layer composed of ZrO_2 - 8% by mass

25   Y_2O_3) is 740 cycles.

EXAMPLE 10. Applied on the plate-shaped samples.
measuring 120x10x1.5 mm, made from a superalloy, con-

taining, % by mass: Cr 22.5; W 7.0; Co 6.0; Mo 4.5;
Fe 4.5; Al 3.0; Ti 1.3; and Ni – the balance, is a three-
layer coating, including an inner plastic layer Ni – 17,2% b
by mass Cr – 3.0% by mass Al – 0.1% by mass Y, 40 μm thick,
an oxidation-resistant layer Ni – 17.6% by mass Cr
– 13.1% by mass Al – 0.1% by mass Y, 50 μm thick, and an
outer ceramic layer ZrO_2 – 25% by mass Y_2O_3 – 0.3% by
mass TiB_2, 90 μm thick. The outer ceramic layer also
contains two interlayers of metallic zirconium, 4.0 μm
thick each, arranged parallel to the surface of the sample
made from a superalloy. The distance from the surface
of the oxidation-resistant layer to the nearest in-
terlayer is 20 μm, and that between the interlayers – 30 μm.

The technological parameters of application of the
coating are similar to those described in Example 7.
In application interlayers of metallic zirconium, the
process of deposition of the outer ceramic layer is in-
terrupted, the rotating fixtures with samples are posi-
tioned over the crucible, where a zirconium ingot is
placed, and by way of its evaporation obtained is an
interlayer of metallic zirconium on the samples, after
which the process of evaporation of ceramics is resumed.

The rate of condensation of metallic zirconium is
1.0 μm/min, and that of the outer ceramic layer –
– 3.5 μm/min. The general porosity of the outer ceramic
layer is 15%.

The conditions of testing for thermal shock resis-

tance are described in Example 2.

In comparison with a coating of the similar thickness and composition, but without interlayers of metallic zirconium, the instant coating has a 1.4-times greater thermal cyclic life time - 584 thermal cycles. A three-layer coating of the same composition, but without titanium diboride in the outer ceramic layer, has failed after 330 thermal cycles. A two-layer coating, containing an oxidation-resistant layer Ni - 17.6% by mass Cr - 13.1% by mass Al - 0.1% by mass Y, 90 μm thick, and an outer ceramic layer ZrO_2 - 25% by mass Y_2O_3, 90 μm, thick , has endured 170 thermal cycles. A coating, containing interlayers of metallic zirconium in the outer ceramic layer had on the metal/ceramic interface, after testing for oxidation-resistance at a temperature of 1,000°C during 500 hours, a layer of alumina Al_2O_3 1.9 μm thick, whereas a traditional two-layer coating - 3.8 μm.

EXAMPLE 11. Applied on the plate-shaped samples made from a superalloy (the form and composition are given in Example 10) is a three-layer coating, whose thickness and composition are given in Example 10. The only difference is the fact that the outer ceramic layer, 110 μm thick, has a composition ZrO_2 - 6% by mass Y_2O_3 - 0.5 by mass Ce_2S_3.

The technology of deposition of the coating is given in Example 9. The rate of condensation of metallic

layers of the coating is 5.6 μm/min, and that of the outer ceramic layer - 1.9 μm/min. The general porosity of the outer ceramic layer is 17% , the average diameter of single grains - 3.3 μm.

5   The conditions of performing the thermal cyclic tests are given in Example 2.

The thermal shock resistance of the present coating is 390 thermal cycles, whereas that of the same coating, but without sulfide in the outer ceramic

10   layer - 355 thermal cycles. A two-layer coating of the metal/ceramic type, containing an oxidation-resistant layer Ni - 17.6% by mass Cr - 13.1% by mass Al - 0.1% by mass Y, 90 μm thick, and an outer ceramic layer ZrO_2 - 6% by mass Y_2O_3, 110 μm thick, has failed after

15   250 thermal cycles.

EXAMPLE 12. Applied on the cylindrical samples made from a superalloy (the form of the samples and composition of the superalloy are indicated in Example 2) is a three-layer coating, into an outer ceramic layer of

20   which introduced are four interlayers of metallic zirconium. The coating includes an inner plastic layer Co -24.0% by mass Cr - 4.1% by mass Al - 0.1% by mass Y, 45 μm thick, an oxidation-resistant layer Co - 27.7% by mass Cr - 10.5% by mass Al - 0.1% by

25   mass Y, 50 μm thick, and an outer ceramic layer ZrO_2 - - 8% by mass Y_2O_3, 123 μm thick.

The thickness of an interlayer, nearest to the

surface of the outer ceramic layer, is 3.0 μm, the other interlayers having a thickness of 2.5 μm each. The distance between the surface of the oxidation-resistance layer and the nearest interlayer of metallic zirconium is 23 μm, and between each of the interlayer - 21 μm.

The technological parameters of deposition of the coating are given in Example 1.

The rate of condensation of metallic layers of the coating is 5.1 μm/min, that of the outer ceramic layer - 2.1 μm/min, and that of metallic zirconium - 1.0 μm/min. The general porosity of the outer ceramic layer is 14%.

The tests for thermal shock resistance have been conducted under conditions described in Example 2.

The thermal shock resistance of the three-layer coating, containing interlayers of metallic zirconium in the outer ceramic layer, covers 593 thermal cycles. A similar coating without interlayers in ceramics has failed after 425 thermal cycles. A two-layer coating, containing an oxidation-resistant layer Co - 27.7% by mass Cr - 10.5% by mass Al - 0.1% by mass Y, 95 μm thick, and an outer ceramic layer ZrO_2 - 8% by mass Y_2O_3, 120 μm thick, has withstood 320 thermal cycles.

The metallographic analysis of the samples withdrawn from the tests after 400 thermal cycles has shown that the thickness of a layer of alumina Al_2O_3 in

a three-layer coating, whose outer ceramic layer contains interlayers of metallic zirconium, is 3.0 μm, whereas in a three-layer coating of the same composition and thickness, but without interlayers of metallic zirco-

5   nium, the thickness of a layer of alumina Al_2O_3 equals 4.5 μm.

EXAMPLE 13. Applied on small-size blades of an aircraft gas turbine (their dimensions and composition of the superalloy are given in Example 4) is a three-

10   layer coating, in whose outer ceramic layer of ZrO_2 - - 25% by mass Y_2O_3 - 5.0% by mass Ce_2O_3 50 μm thick, introduced are seven interlayers of metallic zirconium, 0.5 μm thick each. ·

The distance between the surface of the oxidation-

15   resistant layer and the interlayer of metallic zirconium, nearest to it, as well as the distance between each of the interlayers is 6 μm.

The thickness and composition of metallic layers of the coating are given in Example 4. Special features of

20   the coating deposition technology are given in Example 10.

The rate of condensation of the outer ceramic layer is 2.5 μm/min, and that of metallic zirconium - - 0.8 μm/min. The general porosity of the outer ceramic layer is 17%.

25   The conditions of carrying out thermocyclic tests of blades with coatings are given in Example 4.

Subjected to testing are also a three-layer coating

without interlayers of metallic zirconium and containing no cerium sulfide in the outer ceramic layer, and a two-layer coating described in Example 4, having an outer ceramic layer of ZrO_2 - 25% by mass Y_2O_3.

According to the results of the thermal cyclic tests, they are classified as follows:

(1) a three-layer coating with interlayers of metallic zirconium - 435 thermal cycles;

(2) a three-layer coating without interlayers of metallic zirconium - 375 thermal cycles;

(3) a three-layer coating without interlayers of metallic zirconium and without cerium sulfide - 320 thermal cycles;

(4) a two-layer coating - 264 thermal cycles.

EXAMPLE 14. Applied on cylindrical samples (the size is given in Example 2) made from a superalloy of the following composition, % by mass: Cr 16.0; Mo - 4.1 ; W 9.5; Al 1.4; Ti 1.4; C 0.06 and Ni - the balance, is a three-layer coating of the metal/ceramic type, including an inner plastic layer Co - 22.3% by mass Cr - 2.5% by mass Al - 0.1% by mass Y, 35 μm thick, an oxidation-resistant layer Co - 27.2% by mass Cr - 10.5% by mass Al - 0.1% by mass Y, 45 μm thick, and an outer ceramic layer, 65 μm thick. On the first group of samples applied is an outer ceramic layer ZrO_2 - 8% by mass Y_2O_3, on the second group ZrO_2 - 8% by mass Y_2O_3 - 1.8% by mass TiB_2 , on the third group ZrO_2 -

- 8% by mass Y_2O_3 - 2.5% by mass Ce_2S_3, and on the fourth group ZrO_2 - 8% by mass Y_2O_3 with two inter- layers of metallic zirconium, each 2μm thick (the distance between interlayers and between the surface of the oxidation-resistant layer and an interlayer nearest to it, is 20μm).

Special features of the technology of application of the coating are given in Example 1. The rate of de- position of metallic layers of the coating is 5.3μm/min, that of the outer ceramic layer- $2.0 \pm 0.3\mu$m/min, and that of metallic zirconium 1.0μm/min.

The corrosion life time of the abovementioned coa- tings is determined by way of an isothermic oxidation of the samples, on whose surface applied is a mixture of salts, imitating an ash of the gas turbine fuel of the following composition, % by mass: Na_2SO_4 66.2; Fe_2O_3 20.4; NiO 8.3; CaO - 3.3; V_2O_5 - 1.8. The ash in the form of a suspension, prepared on ethanol, is applied on the coatings. The specific concentration of the ash on the surface of the outer ceramic layer is 10-12 mg/cm^2.

Tests are conducted at temperatures of 750 and 850°C during 9-18 thousand hours. A layer of ash is renewed every 250 hours. The corrosion resistance of coatings is evaluated by means of metallographic analyses and by a weighing method by losses of mass of the samples in case of spalling of the outer ceramic layer. The time required till starting a failure of the metallic

oxidation-resistance layer is considered a life time
of the coating.

Considered as a base coating is a two-layer con-
densation system, comprising an oxidation-resistant
5   layer Co - 27.2% by mass Cr - 11.6% by mass Al - 0.1%
by mass Y, 80 μm thick, and an outer ceramic layer ZrO_2 -
- 8% by mass Y_2O_3, 65 μm thick. The test results are
given in the Table below.

Corrosion life time, thousand hours

Coating	Test temperature	
(outer ceramic layer)	750°C	850°C
Base, two-layer (ZrO_2 - 8% by mass Y_2O_3)	14	6.5
Three-layer (ZrO_2 - 8% by mass Y_2O_3)	18*	10.5
Three-layer (ZrO_2 - 8% by mass Y_2O_3 - 1.8% by mass TiB_2)	18*	12.8
Three-layer (ZrO_2 - 8% by mass Y_2O_3 - 2.5% by mass Ce_2S_3)	18*	11.5
Three-layer (ZrO_2 - 8% by mass Y_2O_3 with two interlayers of Zr)	18*	13.7

* - not failed. Tests are stopped.

The present invention has been described above purely by way of example, and modifications can be made within the scope of the invention.

CLAIMS

1. A metal/ceramic protective coating for superalloy articles, comprising an outer ceramic layer comprising metal oxides; an oxidation-resistant layer comprising an M-Cr-Al-Y alloy, where M comprises Ni, Co, Fe, or a combination thereof, wherein the Al content of the oxidation-resistant layer is 7.5-14.0% by weight; and an inner plastic layer comprising M-Cr-Al-Y alloy, where M comprises Ni, Co, Fe, or a combination thereof, lying between the oxidation-resistant layer and a surface of a superalloy article, the Al content of the inner plastic layer being 2.5-5.5% by weight, and wherein the ratio of the thickness of the oxidation-resistant layer and the inner plastic layer is 4.0-1.0.

2. The protective coating according to Claim 1, wherein the outer ceramic layer comprises yttria-stabilized zirconia.

3. A protective coating according to Claim 2, wherein the outer ceramic layer also comprises a subgroup IV_a metal diboride, with the following ratios of components, % by weight:

TiB_2 or ZrB_2 or HfB_2	− 0.3 − 6.0;
Y_2O_3	− 5.0 − 25.0;
ZrO_2	− the balance.

4.   A protective coating according to Claim 2, wherein the outer ceramic layer also comprises cerium sulphide, with the following ratio of components, % by weight:

Ce_2S_3	− 0.5 − 5.0;
Y_2O_3	− 6.0 − 25.0;
ZrO_2	− the balance.

5.   A protective coating according to Claim 2, 3 or 4, wherein the outer ceramic layer also comprises metallic zirconium in the form of interlayers, 0.5-4.0μm thick, lying in the outer ceramic layer, parallel to a surface of the article, the minimum distance between the surface of the oxidation-resistant layer and an interlayer of metallic zirconium nearest to it being 6.0μm, wherein there is at least one interlayer of metallic zirconium.

6.   A protective coating according to Claim 5, wherein the outer ceramic layer comprises at least four interlayers of metallic zirconium, the thickness of each interlayer being 2.5 − 3.0μm, and wherein the distance between each of the interlayers is 20-23μm, and the distance between the surface of the oxidation-resistant layer and an interlayer nearest to it is 20-23μm.

7.   A protective coating according to Claims 1 to 6, further comprising an aluminide layer with an aluminium

content of 15 - 35% by weight, and a thickness of 5.0 - 45.0μm, lying between the inner plastic layer and a surface of a superalloy article.

8.   A protective coating of the metal/ceramic type for articles from superalloys, comprising an outer ceramic layer on the basis of metal oxides, an oxidation-resistant layer from an alloy M-Cr-Al-Y, where M is Ni, Co, Fe, taken separately or in combination, with a content of Al in the oxidation-resistant layer of 7.5-14.0% by mass, and an inner plastic layer from an alloy M-Cr-Al-Y, where M is Ni, Co, Fe, taken separately or in combination, arranged between the oxidation-resistant layer and a surface of an article from the superalloy, with the content of Al in the inner plastic layer of 2.5-5.5% by mass, the ratio of thicknesses of the oxidation-resistant layer and the inner plastic layer being 4.0-1.0.

9.   A protective coating according to Claim 8 wherein the outer ceramic layer on the basis of yttria-stabilized zirconia also comprises one of diborides of metals of subgroup IVa of the Periodic system of elements, with the following ratio of components, % by mass:

TiB_2 or ZrB_2 or HfB_2	- 0.3 - 6.0;
Y_2O_3	- 5.0 - 25.0;
ZrO_2	- the balance.

10.   A protective coating according to Claim 8,
wherein the outer ceramic layer on the basis of
yttria-stabilized zirconia also comprises cerium sulfide,
with the following ratio of components, % by mass:

Ce_2S_3	- 0.5 - 5.0;
Y_2O_3	- 6.0 - 25.0;
ZrO_2	- the balance.

11.   A protective coating according to Claim 8 or 9 or
10, wherein the outer ceramic layer on the basis of
yttria-stabilized zirconia also comprises metallic
zirconium in the form of interlayers, 0.5-4.0μm thick,
arranged in the outer ceramic layer, parallel to an
article surface, the minimum distance between the surface
of the oxidation-resistant layer and an interlayer of
metallic zirconium, nearest to it, being 6.0μm, and the
number of interlayers of metallic zirconia - at least one.

12.   A protective coating according to Claim 11,
wherein the outer ceramic layer on the basis of
yttria-stabilized zirconia, comprises at least four
interlayers of metallic zirconium, the thickness of each
interlayer being 2.5 - 3.0μm, and the distance between
each of the interlayers, as well as the distance between
the surface of the oxidation-resistant layer and an
interlayer, nearest to it, being 20-23μm.

13.   A protective coating according to Claims 8 to 12, wherein it also comprises an aluminide layer with the content of aluminium 15 - 35% by mass, 5.0 - 45.0μm thick, arranged between the inner plastic layer and the surface of an article from a superalloy.

14.   A protective coating according to any of the preceding Claims, as identified in the description, examples and accompanying drawings.

15.   A protective coating substantially as herein described with reference to the accompanying drawings.

16.   A protective coating substantially as herein described with reference to any of the foregoing examples.

54

Patents Act 1977
Examiner's report to the Comptroller under
Section 17 (The Search Report)

	Application number
	9102806.8

Relevant Technical fields

(i) UK CI (Edition   K   )   C7F (FGA, FGZ, FPCX, FPDX, FPEX, FBAX, FBBX, FBXX)

(ii) Int CI (Edition   5   )   C23C

Databases (see over)

(i) UK Patent Office

(ii)
ONLINE DATABASES: WPI

Search Examiner

P G BEDDOE

Date of Search

26 MARCH 1991

Documents considered relevant following a search in respect of claims   1-16

Category (see over)	Identity of document and relevant passages	Relevant to claim(s)
Y	GB 2,206,358 A (UKAEA) see especially Claim 1; page 4 lines 1-13 and Example 1	1,8
Y	CO2,226 050 A GB 2,206,050 A (UNITED TECHNOLOGIES) see especially Claim 1	1,2,8
Y	GB 2,159,838 A (UNITED TECHNOLOGIES) see especially Claim 1	1,8
Y	EP 0,266,299 A2 (UNITED TECHNOLOGIES) see especially Claim 1	1,2,8
Y	EP 0,185,603 A1 (UNITED TECHNOLOGIES) see especially pages 11-13	1,2,8
Y	US 4,851,300 A (UNITED TECHNOLOGIES) see especially Claim 1; column 2 line 33 - column 3 line 44	1,8

SF2(p)

Category	Identity of document and relevant passages	Relevant to claim(s)

Categories of documents

X: Document indicating lack of novelty or of inventive step.

Y: Document indicating lack of inventive step if combined with one or more other documents of the same category.

A: Document indicating technological background and/or state of the art.

P: Document published on or after the declared priority date but before the filing date of the present application.

E: Patent document published on or after, but with priority date earlier than, the filing date of the present application.

&: Member of the same patent family, corresponding document.

Databases: The UK Patent Office database comprises classified collections of GB, EP, WO and US patent specifications as outlined periodically in the Official Journal (Patents). The on-line databases considered for search are also listed periodically in the Official Journal (Patents).

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

❑ **BLACK BORDERS**

❑ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

❑ **FADED TEXT OR DRAWING**

❑ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

❑ **SKEWED/SLANTED IMAGES**

☑ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

❑ **GRAY SCALE DOCUMENTS**

☑ **LINES OR MARKS ON ORIGINAL DOCUMENT**

❑ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

❑ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.
As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.